
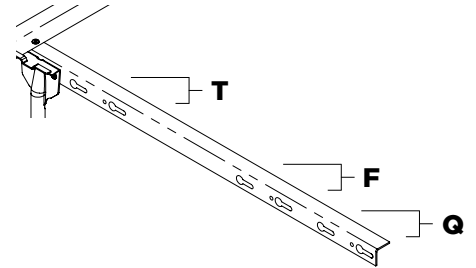



# GLIDEAWAY®

## MODEL TFQK-7


8226 Lackland Rd • St. Louis, MO 63114 | 1.800.428.5222

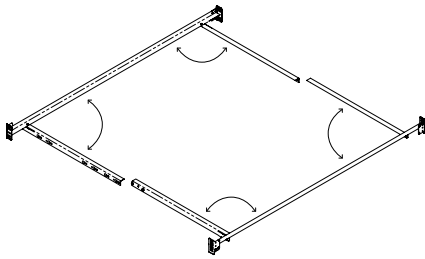


**1.** Swing out all cross rails as shown in diagram.

**2.** Insert glides into 4 corner legs. Slip plastic caps on ends of side rails.


**3.** Select proper pair of keyhole slots for the size of bedding to be used.

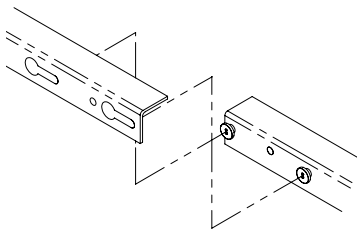


Queen Sizing For Reference



Queen Sizing For Reference



Queen Sizing For Reference





**4.** Overlap cross rails and slide shoulder rivets into keyhole slots.

**5.** Pull crossrails outward so that shoulder rivets lock into keyhole slots.

**6.** Insert plastic stopper through hole in side of cross arms to lock them into place.




**7.** Insert 3 glides into center support bar.

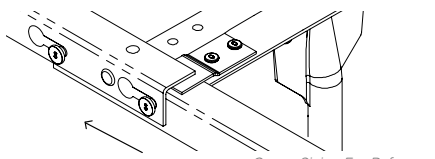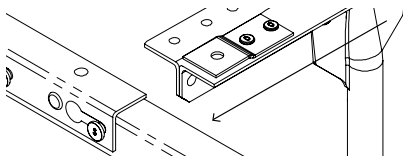

Queen Sizing For Reference

**8.** After the bed has been assembled in the correct size, swing the angle iron center support under cross arms so that the end clips slide between the cross arms directly in the center of the bed as shown.

### FOR KING FOLLOW STEPS 1 & 2 FIRST

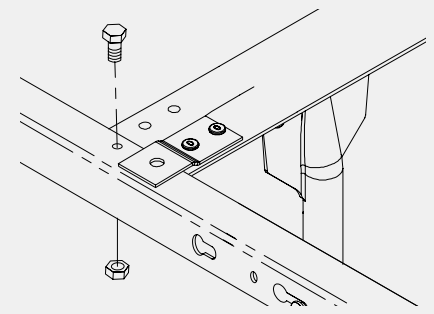

**3.** Follow steps 1 and 2. Select proper pair of keyhole slots in splicer bar. Attach both ends like as directed in steps 4 and 5. Insert 3 glides into center support bar as directed in step 7.

**8.** Complete step 8 as directed. Attach nut and bolt through the hole next to clip.